

CANTER


Cab and Chassis



FUSO CANTER

GENERAL SPECIFICATIONS	FE71	FE84	FE85	
DIMENSIONS	10-footer ; 4-wheeler	16-footer ; 6-wheeler	18-footer ; 6-wheeler	
Overall Length (mm)	4,660	6,750	7,210	
Overall Width (mm)	1,695	1,995	2,135	
Overall Height, approx. (mm)	2,005	2,200	2,270	
Wheelbase (mm)	2,500	3,850	4,170	
Rear Body Length (ft)	10	16	18	
Frame Width (mm)	700	753	840	
Tread (Front / Rear) (mm)	1,390 / 1,380	1,655 / 1,495	1,665 / 1,660	
Min. Ground Clearance (mm)	200		210	
Curb Weight (kg)	1,760	2,290	2,610	
Gross Vehicle Weight (kg)	4,400	6,500	8,200	
Payload (kg)	2,640	4,210	5,590	
Fuel Tank Capacity (L)	70	100		
PERFORMANCE				
Min. Turning Radius (mm)	5.1	6.8	7.3	
ENGINE				
Model	4M42-3AT2	4M42-3AT4	4M50-5AT5	
Type	4-Stroke Cycle Water-cooled Direct Injection Diesel with Turbocharger and Glowplug			
Cylinders	In-line 4			
Displacement	2,977		4,899	
Compression Ratio	15.5 : 1			
Bore x Stroke (mm)	95 x 105		114 x 120	
Output (Ps/rpm)	125 / 3,200	145 / 3,200	179 / 2,700	
Torque (N-m/rpm)	294 / 1,700	362 / 1,700	530 / 1,600	
TRANSMISSION				
Type	Synchromesh 2nd - 5th Forward Gears and Constantmesh 1st Forward and Reverse Gears	Synchromesh 2nd - 6th Forward Gears and Constantmesh 1st Forward and Reverse Gears		
Gear Ratios	1st	5.175	5.400	
	2nd	3.261	3.657	
	3rd	1.785	2.368	
	4th	1.000	1.465	
	5th	0.715	1.000	
	6th	-	0.711	
Reverse	5.175	5.400		
Final Gear Ratio	5.714			
AXLE				
Front	Reverse Elliot "I" Beam			
Rear	Fully Floating			
SUSPENSION				
Front	Laminated Leaf Springs with Double Acting Hydraulic Telescopic Shock Absorbers and Stabilizer	Laminated Leaf Springs with Double Acting Hydraulic Telescopic Shock Absorbers		
Rear	Laminated Leaf Springs with Double Acting Hydraulic Telescopic Shock Absorbers			
BRAKES				
Service	Hydraulic with Vacuum Servo Assistance, Dual Circuit			
Parking	Internal Expanding Type on Propeller Shaft			
Auxiliary	Exhaust Brake			
TIRES AND WHEELS				
Tires	Front	Single, 7.50 R15-12PR	Single, 7.00 R16-12PR	Single, 7.50 R16-14PR
	Rear	Single, 7.50 R15-12PR	Dual, 7.00 R16-12PR	Dual, 7.50 R16-14PR
Wheels	15 x 6.00GS - 50mm - 6t, 6 studs, 2 pieces (Steel Rim)	16 x 5.50F - 115mm - 8t, 5 studs, 2 pieces (Steel Rim)	16 x 6.00GS - 127mm - 9t, 5 studs, 2 pieces (Steel Rim)	
STEERING				
Gear Type	Ball and Nut Type with Integral-type Hydraulic Power Booster			
Power Steering	Equipped			
Steering Wheel	4-spoke Polyurethane			
Tilt Adjustment	Equipped			
Telescopic Adjustment	Equipped			
SAFETY				
Seatbelts	3 pt. ELR x2 and 2 pt. Lappbelt			
Collapsible Steering Wheel	Equipped			
Side Impact Beams	Equipped			
ELECTRICAL SYSTEM				
Voltage	12V		24V	
Battery	12V x 1		12V x 2	
Amperage	75A		80A	

1. Mitsubishi Motors Philippines Corporation reserves the right to alter any specification and pricing details without prior notice.
2. Photos and specs shown in this flyer may vary from actual unit.

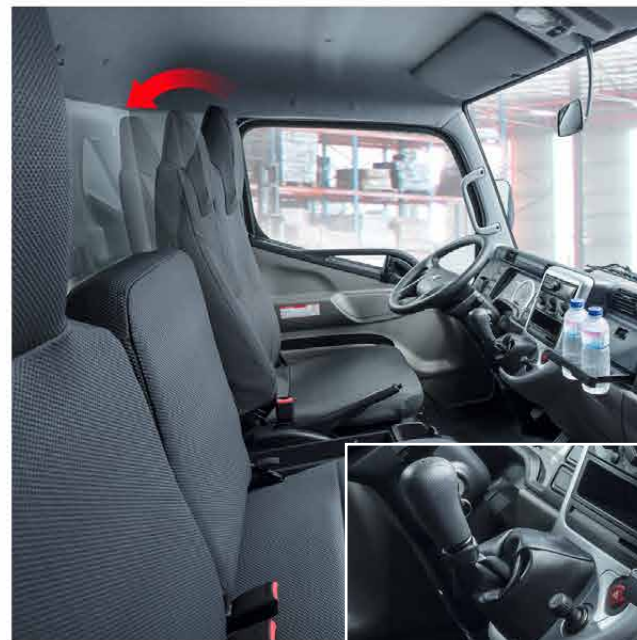

First in class dash-mounted gear shift lever



Tilt and telescopic adjusting steering wheel


Superior Cabin Interior : Aside from a visually exciting and aerodynamic cab, the Canter boasts of a comfortable interior with car-like features and more than enough legroom.

*Audio system (Customer Option)

New powerful yet economical Euro 4 Turbo Diesel engine



TURBO INTERCOOLER



Strong, durable, and reliable chassis.

Improvements on the chassis were made to ensure strength and longevity.



3 Years 100,000km WARRANTY

On Quality:
We seek excellence in our products and services and recognize that customer satisfaction is the essence of our mission.
www.mitsubishi-motors.com.ph



BF03002008

FUSO authorized distributor
Mitsubishi Motors Philippines Corporation